
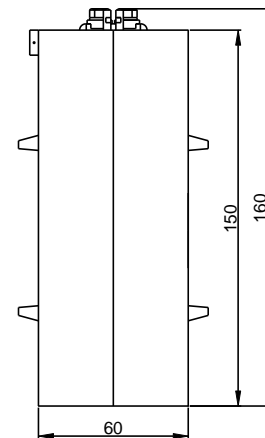


ISN 40

Current transformer bus-bar type ISN 40. Max bus-bar size 3×60×10 mm.

Max voltage $U_m = 1.2$ kV. Test voltage $U_p = 6$ kV.

		ISN 40					
		h 066					
I_{pn}		cl. 0.2S	cl. 0.2	cl. 0.5S	cl. 0.5	cl. 1	cl. 3
A	VA						
1000	5		5	5	5	5	5
	10			10	10	10	10
	15			15	15	15	15
	20				20	20	20
	30					30	30
1200	5		5	5	5	5	5
	10			10	10	10	10
	15			15	15	15	15
	20				20	20	20
	30					30	30
1250	5		5	5	5	5	5
	10			10	10	10	10
	15			15	15	15	15
	20				20	20	20
	30					30	30
1500	5		5	5	5	5	5
	10			10	10	10	10
	15			15	15	15	15
	20				20	20	20
	30					30	30
1600	5		5	5	5	5	5
	10			10	10	10	10
	15			15	15	15	15
	20				20	20	20
	30					30	30
2000	5		5	5	5	5	5
	10			10	10	10	10
	15			15	15	15	15
	20				20	20	20
	30					30	30
2500	5		5	5	5	5	5
	10			10	10	10	10
	15			15	15	15	15
	20				20	20	20
	30					30	30
3000	5		5	5	5	5	5
	10			10	10	10	10
	15			15	15	15	15
	20				20	20	20
	30					30	30

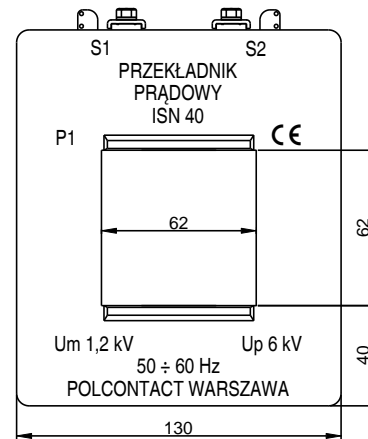

Rated secondary current $I_{sn} = 5$ A.

Rated secondary current $I_{sn} = 1$ A available on request.

Security factor for apparatus FS5.

Other parameters available on request after consultation with our Technical Department.



Example of order: ISN 40 h 066; 3000/5 A; 10 VA; cl. 0.5S

ISN 41

Current transformer bus-bar type ISN 41. Max bus-bar size 3×80×10 mm.

Max voltage $U_m = 1.2$ kV. Test voltage $U_p = 6$ kV.

ISN 41						
h 086						
I_{pn}	cl. 0.2S	cl. 0.2	cl. 0.5S	cl. 0.5	cl. 1	cl. 3
A	VA					
1500		5	5	5	5	5
		10	10	10	10	10
			15	15	15	15
				20	20	20
				30	30	30
1600		5	5	5	5	5
		10	10	10	10	10
			15	15	15	15
				20	20	20
				30	30	30
2000	5	5	5	5	5	5
	10	10	10	10	10	10
	15	15	15	15	15	15
		20	20	20	20	20
				30	30	30
2500	5	5	5	5	5	5
	10	10	10	10	10	10
	15	15	15	15	15	15
		20	20	20	20	20
			30	30	30	30
3000	5	5	5	5	5	5
	10	10	10	10	10	10
	15	15	15	15	15	15
	20	20	20	20	20	20
	30	30	30	30	30	30
4000	5	5	5	5	5	5
	10	10	10	10	10	10
	15	15	15	15	15	15
	20	20	20	20	20	20
	30	30	30	30	30	30

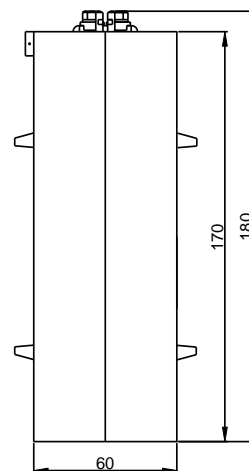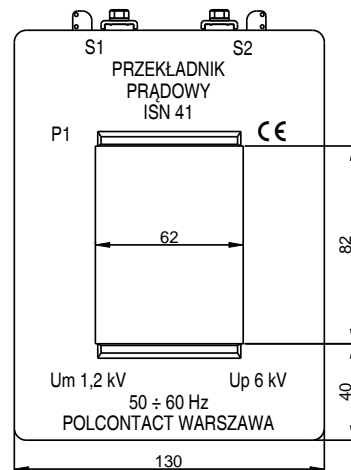

Rated secondary current $I_{sn} = 5$ A.

Rated secondary current $I_{sn} = 1$ A available on request.

Security factor for apparatus FS5.


Other parameters available on request after consultation with our Technical Department.

Example of order: ISN 41 h 086; 2500/5 A; 10 VA; cl. 0.2

ISN 42

Current transformer bus-bar type ISN 42. Max bus-bar size 3×100×10 mm.

Max voltage $U_m = 1.2$ kV. Test voltage $U_p = 6$ kV.

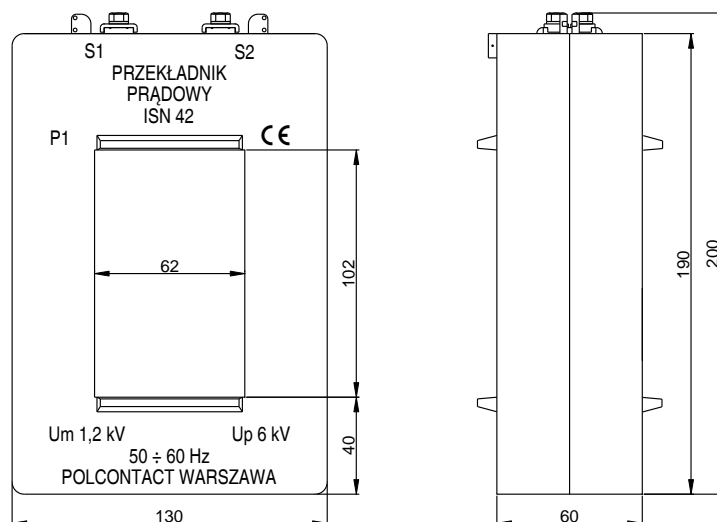

ISN 42						
h 106						
I_{pn}	cl. 0.2S	cl. 0.2	cl. 0.5S	cl. 0.5	cl. 1	cl. 3
A	VA					
2000	5	5	5	5	5	5
	10	10	10	10	10	10
	15	15	15	15	15	15
		20	20	20	20	20
				30	30	30
2500	5	5	5	5	5	5
	10	10	10	10	10	10
	15	15	15	15	15	15
		20	20	20	20	20
				30	30	30
3000	5	5	5	5	5	5
	10	10	10	10	10	10
	15	15	15	15	15	15
	20	20	20	20	20	20
	30	30	30	30	30	30
4000	5	5	5	5	5	5
	10	10	10	10	10	10
	15	15	15	15	15	15
	20	20	20	20	20	20
	30	30	30	30	30	30



Rated secondary current $I_{sn} = 5$ A.

Rated secondary current $I_{sn} = 1$ A available on request.

Security factor for apparatus FS5.


Other parameters available on request after consultation with our Technical Department.

Example of order: ISN 42 h 106; 2500/5 A; 10 VA; cl. 0.2

ISN 43

Current transformer bus-bar type ISN 43. Max bus-bar size 3×120×10 mm.

Max voltage $U_m = 1.2$ kV. Test voltage $U_p = 6$ kV.

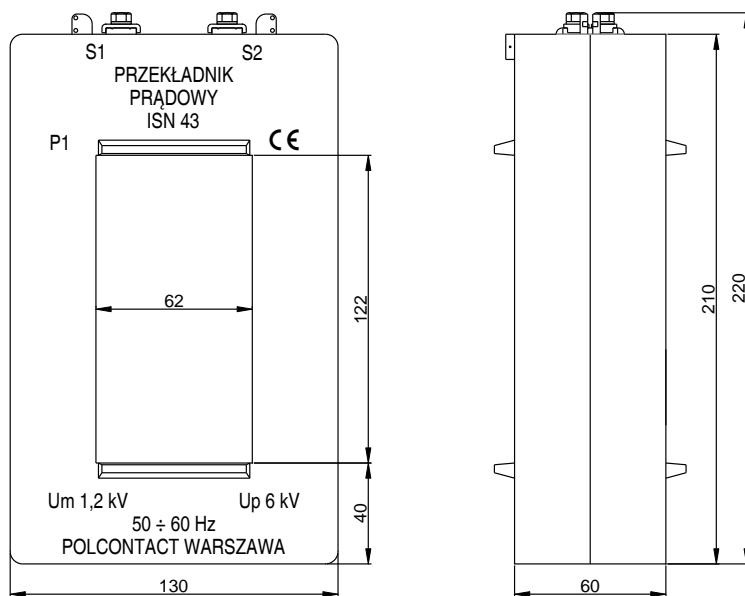

ISN 43						
h 126						
I_{pn}	cl. 0.2S	cl. 0.2	cl. 0.5S	cl. 0.5	cl. 1	cl. 3
A	VA					
2000	5	5	5	5	5	5
	10	10	10	10	10	10
		15	15	15	15	15
			20	20	20	20
				30	30	30
2500	5	5	5	5	5	5
	10	10	10	10	10	10
	15	15	15	15	15	15
		20	20	20	20	20
			30	30	30	30
3000	5	5	5	5	5	5
	10	10	10	10	10	10
	15	15	15	15	15	15
	20	20	20	20	20	20
	30	30	30	30	30	30
4000	5	5	5	5	5	5
	10	10	10	10	10	10
	15	15	15	15	15	15
	20	20	20	20	20	20
	30	30	30	30	30	30
5000	5	5	5	5	5	5
	10	10	10	10	10	10
	15	15	15	15	15	15
	20	20	20	20	20	20
	30	30	30	30	30	30



Rated secondary current $I_{sn} = 5$ A.

Rated secondary current $I_{sn} = 1$ A available on request.

Security factor for apparatus FS5.


Other parameters available on request after consultation with our Technical Department.

Example of order: ISN 43 h 126; 4000/5 A; 10 VA; cl. 0.2S

ISN 44

Current transformer bus-bar type ISN 44. Max bus-bar size 3×160×10 mm.

Max voltage $U_m = 1.2$ kV. Test voltage $U_p = 6$ kV.

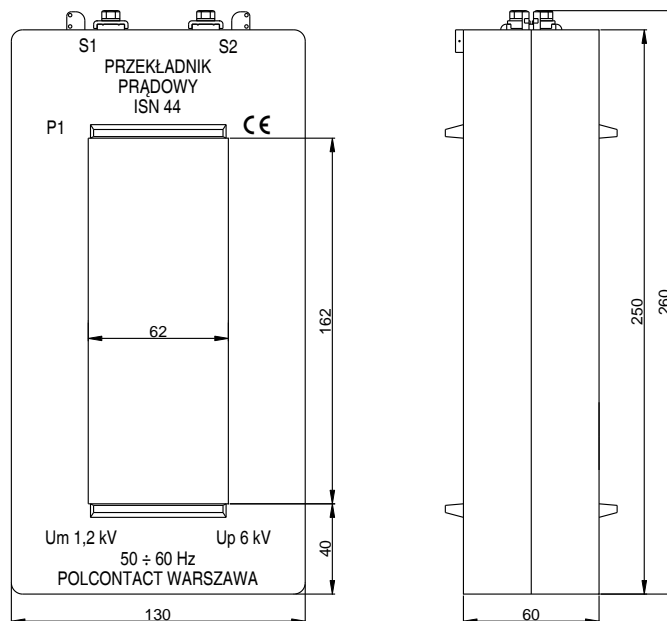

ISN 44						
h 166						
I_{pn}	cl. 0.2S	cl. 0.2	cl. 0.5S	cl. 0.5	cl. 1	cl. 3
A	VA					
2000	5	5	5	5	5	5
	10	10	10	10	10	10
	-	15	15	15	15	15
	-	-	20	20	20	20
	-	-	-	30	30	30
2500	5	5	5	5	5	5
	10	10	10	10	10	10
	15	15	15	15	15	15
	-	20	20	20	20	20
	-	-	30	30	30	30
3000	5	5	5	5	5	5
	10	10	10	10	10	10
	15	15	15	15	15	15
	20	20	20	20	20	20
	30	30	30	30	30	30
4000	5	5	5	5	5	5
	10	10	10	10	10	10
	15	15	15	15	15	15
	20	20	20	20	20	20
	30	30	30	30	30	30
5000	5	5	5	5	5	5
	10	10	10	10	10	10
	15	15	15	15	15	15
	20	20	20	20	20	20
	30	30	30	30	30	30



Rated secondary current $I_{sn} = 5$ A.

Rated secondary current $I_{sn} = 1$ A available on request.

Security factor for apparatus FS5.

Other parameters available on request after consultation with our Technical Department.

Example of order: ISN 44 h 166; 5000/5 A; 5 VA; cl. 0.2S