


Current transformer JK 24 D 30
measuring, protective, measuring nad protective
for putting on a single phase medium voltage cable

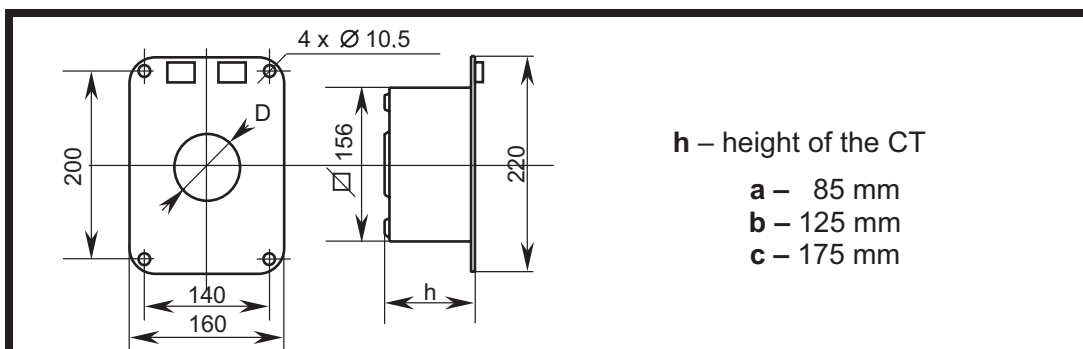

		Current transformer JK 24 D 30 (D = 30 mm)											Identification Number		
Rated primary current ↓	Version ↓	Measuring			Protective			Measuring and Protective							
		„P” single core		„2P” double core		„Z” single core		„2Z” double core		„PZ” double core					
		class 0.5		class 0.5		class 10P		class 10P		class 0.5		class 10P			
		FS 10		FS 10		10		10		FS 10		10			
A		VA	h	VA	VA	h	VA	h	VA	VA	h	VA	VA	h	
30	I						5	c							2301
	II														2302
40	I						5	c							2303
	II						7,5	c							2304
50	I						5	c	5	5	c				2305
	II						7,5	c							2306
60	I	5	c				5	b	5	5	c				2307
	II	7,5	c				10	c							2308
75	I	7,5	c				5	b	5	5	c	7,5	5	c	2309
	II	10	c				15	c	5	7,5	c				2310
100	I	7,5	c	5	5	c	5	a	5	5	b	7,5	5	c	2311
	II	15	c	5	7,5	c	15	c	5	10	c	10	10	c	2312
125	I	10	c	5	5	c	5	a	5	5	b	10	5	c	2313
	II	15	c	5	7,5	c	15	c	5	15	c	15	15	c	2314
150	I	10	b	7,5	10	c	5	a	5	5	b	10	5	c	2315
	II	15	c	10	10	c	15	c	5	15	c	15	10	c	2316
200	I	10	b	10	15	c	5	a	5	5	b	10	5	b	2317
	II	15	b	10	15	c	5	b	5	15	c	15	15	c	2318
250	I	10	b	10	15	c	5	a	5	5	b	10	5	b	2319
	II	15	b	15	15	c	15	b	5	15	b	15	15	b	2320
300	I	10	b	10	15	c	5	a	5	5	b	10	5	b	2321
	II	15	b	15	15	c	15	c	5	15	b	15	15	b	2322
400	I														2323
	II														2324
500	I														2325
	II														2326
600	I														2327
	II														2328
750	I														2329
	II														2330

Rated secondary current: $I_{sn} = 5$ A.
 Other parameters available on request.