


ISN 3R



Znamionowy prąd pierwotny	Moc	Klasa dokładności		Znamionowy prąd wtórny	Max. wymiar szyny/kabla
A	VA	-		A	mm
100	1 ÷ 7,5	3		5 lub 1	60 × 10 lub Ø30
150	1 ÷ 2	1	3		
	2,5 ÷ 7,5	3			
200	2,5 ÷ 5	1	3		
	7,5	3			
250	1 ÷ 2,5	0,5	1 3		
	3,75 ÷ 7,5	1	3		
300	10	3			
	1 ÷ 5	0,5	1 3		
	7,5	1	3		
400	10	3			
	1 ÷ 5	0,5	1 3		
	7,5	1	3		
500	10	3			
	1 ÷ 5	0,5	1 3		
	7,5 ÷ 10	1	3		
600	15	3			
	1 ÷ 5	0,5	1 3		
	7,5 ÷ 15	1	3		
750	20	3			
	1 ÷ 15	0,5	1 3		
	25	1	3		
800	1 ÷ 15	0,5	1 3		
	20 ÷ 25	1	3		

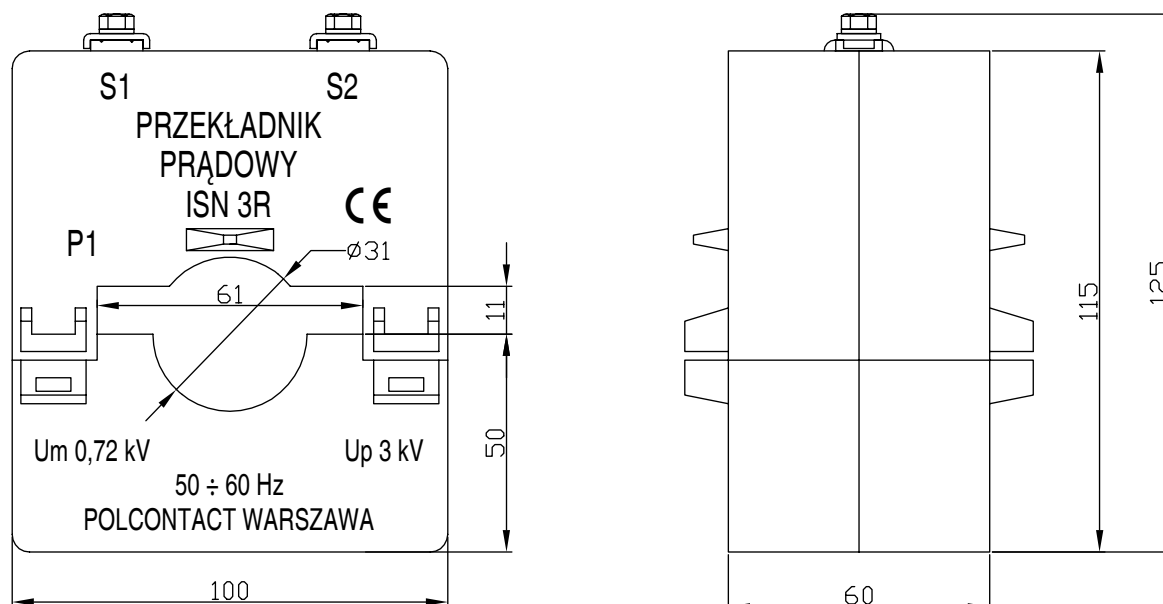

Przykład zamówienia:
Przekładnik
ISN 3R 200/5 A; 5 VA; kl. 1