



ISN 31m, ISN 32m

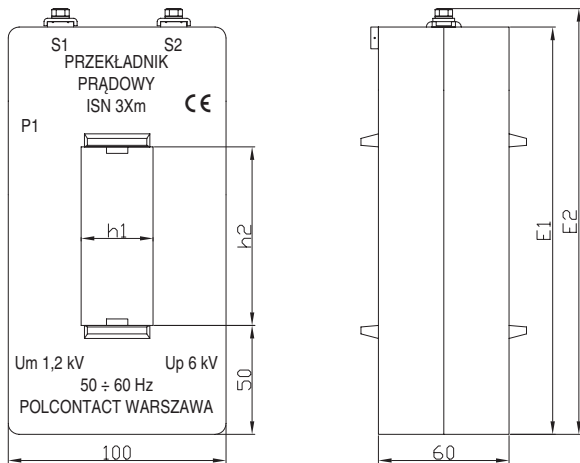

Type	Model/ Dimensions	Primary current	Rated parameters secondary circuit	
			burden	class
ISN 31m	h 083 h ₁ = 33 mm h ₂ = 82 mm E ₁ = 185 mm E ₂ = 195 mm	500 ÷ 2500 A	50 Ω	1
			100 Ω	
			250 Ω	
			500 Ω	
ISN 32m	h 103 h ₁ = 33 mm h ₂ = 102 mm E ₁ = 205 mm E ₂ = 215 mm	500 ÷ 3000 A	50 Ω	1
			100 Ω	
			250 Ω	
			500 Ω	
			750 Ω	

ISN 4m

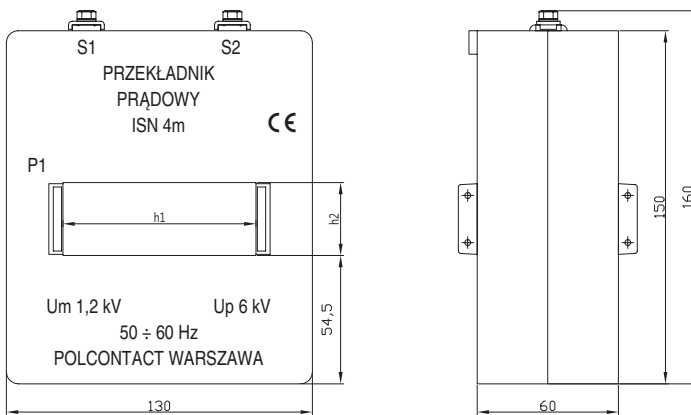

Type	Model/ Dimension	Primary current	Rated parameters secondary circuit	
			burden	class
ISN 4m	h 083 h ₁ = 82 mm h ₂ = 31 mm	500 ÷ 3000 A	50 Ω	1
			100 Ω	
			250 Ω	
			500 Ω	
ISN 4m	h 103 h ₁ = 102 mm h ₂ = 31 mm	500 ÷ 3000 A	500 Ω	1
			750 Ω	

Example of order:
Current transformer
ISN 30m h 043;
600 A; 500 Ω