


# ISN 4SR



Rated primary current	Rated power	Accuracy class	Rated secondary current	Max bus dimension
A	VA	-	A	mm
600	2,5 ÷ 15	0,5 1 3	5 or 1	80 x 30
	20	1 3		
	30	3		
750	2,5 ÷ 20	0,5 1 3		
	30	1 3		
800	2,5 ÷ 20	0,5 1 3		
	30	1 3		
1000	2,5 ÷ 5	0,2 0,5 1 3		
	10 ÷ 30	0,5 1 3		
	40	1 3		
1200	2,5 ÷ 5	0,2 0,5 1 3		
	10 ÷ 40	0,5 1 3		
1250	2,5 ÷ 5	0,2 0,5 1 3		
	10 ÷ 40	0,5 1 3		
1500	2,5 ÷ 10	0,2 0,5 1 3		
	15 ÷ 40	0,5 1 3		
1600	2,5 ÷ 10	0,2 0,5 1 3		
	15 ÷ 40	0,5 1 3		
2000	2,5 ÷ 15	0,2 0,5 1 3	5	
	20 ÷ 40	0,5 1 3		

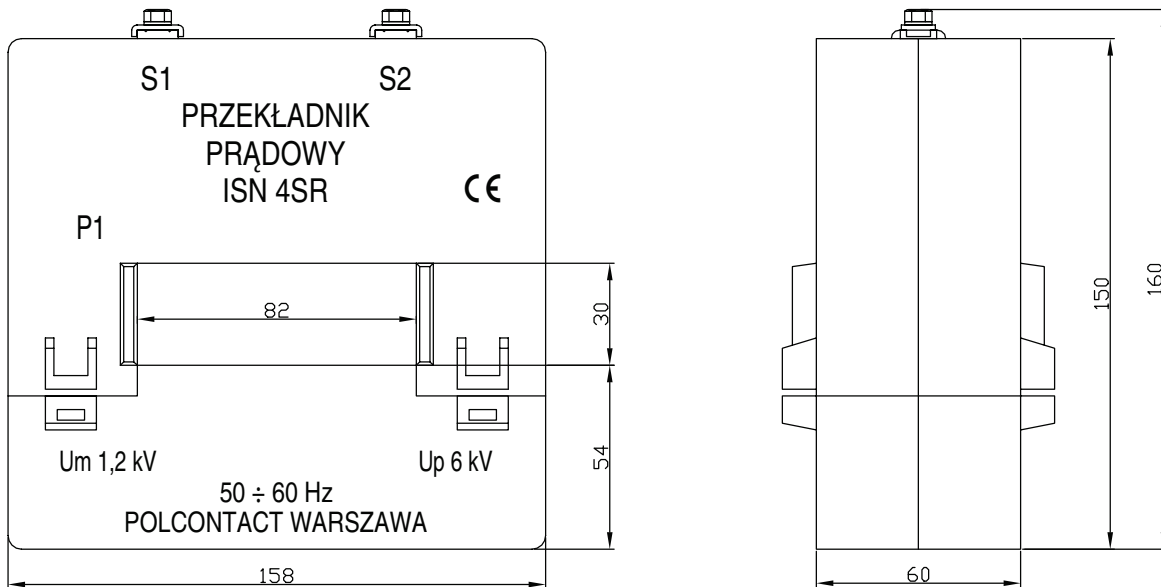

Example of order:  
Current transformer  
ISN 4SR 1000/5 A; 10 VA;  
class 0,5