
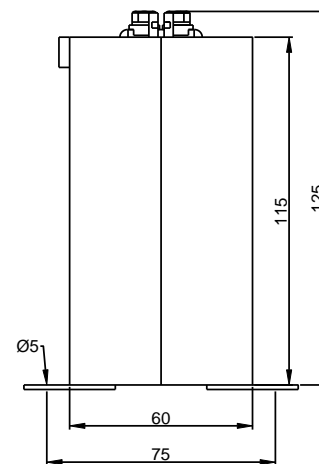


ELA 2

Low voltage current transformer type ELA 2. Inside diameters $\varnothing 60$ mm.

Max voltage $U_m = 1.2$ kV. Test voltage $U_p = 6$ kV.

		ELA 2					
		D 60					
I_{pn}		cl. 0.2S	cl. 0.2	cl. 0.5S	cl. 0.5	cl. 1	cl. 3
A	VA						
75						2.5	2.5
							5
100					2.5*	2.5	2.5
						5	5
							7.5
150							10
					2.5*	2.5	2.5
					5*	5	5
						7.5	7.5
200							10
			2.5*	2.5*	2.5	2.5	2.5
					5	5	5
						7.5	7.5
						10	10
250						15	15
			2.5*	2.5	2.5	2.5	2.5
				5*	5	5	5
					7.5	7.5	7.5
300						10	10
						15	15
			2.5	2.5	2.5	2.5	2.5
				5*	5	5	5
					7.5	7.5	7.5
400						10	10
						15	15
		2.5*	2.5	2.5	2.5	2.5	2.5
			5*	5*	5	5	5
500						7.5	7.5
					7.5	7.5	7.5
						10	10
						15	15
							15
600						15	15
						10	10
		2.5	2.5	2.5	2.5	2.5	2.5
			5*	5	5	5	5
750						7.5	7.5
						10	10
						15	15
800						15	15
						10	10
						7.5	7.5
						5	5
1000						5	5
						7.5	7.5
						10	10
						15	15
1250						15	15
						10	10
						7.5	7.5
						5	5
1500						5	5
						7.5	7.5
						10	10
						15	15
						15	15

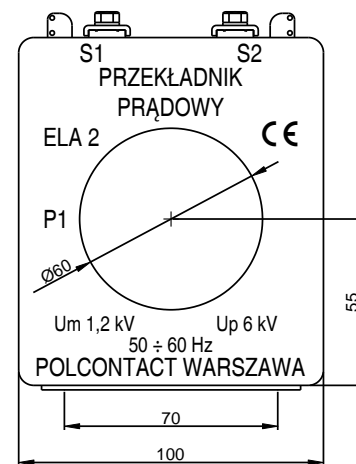

Rated secondary current $I_{sn} = 5$ or 1 A.
 Security factor for apparatus FS5.
 Other parameters available on request after consultation with our Technical Department.

Example of order:

ELA 2 D 60; 750/5 A; 5 VA; cl. 0.5S

* - special version