
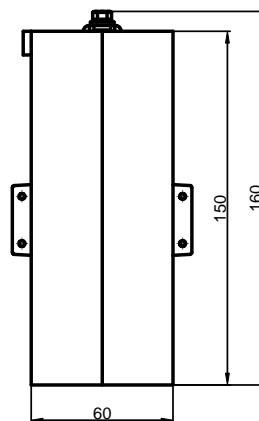


# ISN 4S

Current transformer ISN 4S for horizontal bus 2×120×10 mm.

Max voltage  $U_m = 1,2$  kV; test voltage  $U_p = 6$  kV.

		ISN 4S				
		h 123				
$I_{pn}$	cl. 0,2S	cl. 0,2	cl. 0,5S	cl. 0,5	cl. 1	cl. 3
A	VA					
1000			5	5	5	5
			10	10	10	10
			15	15	15	15
			20	20	20	20
			30	30	30	30
1200		5	5	5	5	5
		10	10	10	10	10
		15	15	15	15	15
		20	20	20	20	20
		30	30	30	30	30
1250		5	5	5	5	5
		10	10	10	10	10
		15	15	15	15	15
		20	20	20	20	20
		30	30	30	30	30
1500		5	5	5	5	5
		10	10	10	10	10
		15	15	15	15	15
		20	20	20	20	20
		30	30	30	30	30
1600		5	5	5	5	5
		10	10	10	10	10
		15	15	15	15	15
		20	20	20	20	20
		30	30	30	30	30
2000	5	5	5	5	5	5
	10	10	10	10	10	10
	15	15	15	15	15	15
	20	20	20	20	20	20
	30	30	30	30	30	30
2500	5	5	5	5	5	5
	10	10	10	10	10	10
	15	15	15	15	15	15
	20	20	20	20	20	20
	30	30	30	30	30	30
3000	5	5	5	5	5	5
	10	10	10	10	10	10
	15	15	15	15	15	15
	20	20	20	20	20	20
	30	30	30	30	30	30
4000	5	5	5	5	5	5
	10	10	10	10	10	10
	15	15	15	15	15	15
	20	20	20	20	20	20
	30	30	30	30	30	30

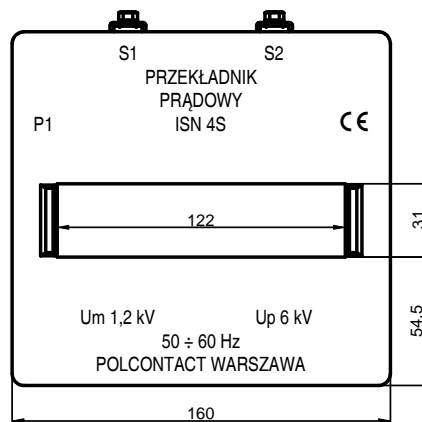

Rated secondary current  $I_{sn} = 5$  or  $1$  A.  
 Security factor for apparatus FS5.  
 Other parameters available on request after consultation with our Technical Department.  
 Example of order:  
 ISN 4S h 123; 3000/5 A; 10 VA; cl. 0,5S