


IZK 3U

Protective current transformer cable type IZK 3U.
 Max voltage $U_m = 1,2 \text{ kV}$, test voltage $U_p = 6 \text{ kV}$.

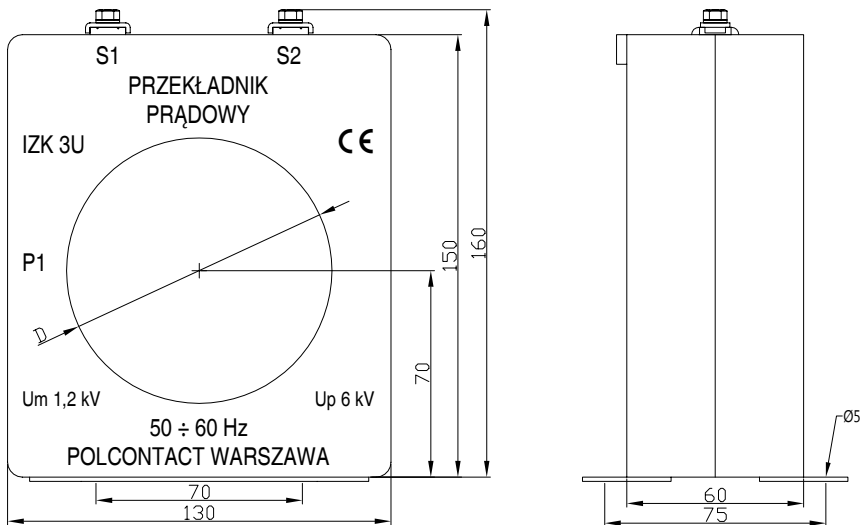

		IZK 3U																								
		D 31 mm				D 41 mm				D 60 mm				D 90 mm												
I_{pn}	A	class 5p 5	class 5p 10	class 5p 15	class 10p 5	class 10p 10	class 10p 15	class 5p 5	class 5p 10	class 5p 15	class 10p 5	class 10p 10	class 10p 15	class 5p 5	class 5p 10	class 5p 15	class 10p 5	class 10p 10	class 10p 15	class 5p 5	class 5p 10	class 5p 15	class 10p 5	class 10p 10	class 10p 15	
		VA	VA	VA	VA	VA	VA	VA	VA	VA	VA	VA	VA	VA	VA	VA	VA	VA	VA	VA	VA	VA	VA	VA	VA	
50		1	1	1	4	2	1																			
75		2,5	2,5	2,5	7,5	4	2,5	1,5	1,5	1,5	5	3	1,5													
100		10	5	3	10	5	3	2,5	2,5	2,5	10	4	2,5	1,25	1,25											
150		15	7,5	5	15	7,5	5	7,5	7,5	4	15	7,5	4	2	2	2	7,5	4	2				4	1,5		
200		15	10	5	10	15	5	15	10	5	10	10	5	5	5	3	10	5	3			1	5	2		
250		15	10	5	10	15	5	15	10	5	15	10	5	7,5	7,5	4	15	7,5	4	7,5	2,5	1,25	7,5	2,5	1,25	
300		15	10	5	10	15	5	15	10	5	15	10	5	15	7,5	5	15	7,5	4	7,5	3	1,5	7,5	3	1,5	
400								15	10	5	15	10	5	15	10	5	10	10	5	10	5	2,5	10	5	2,5	
500														15	10	5	10	10	5	15	5	3	15	5	3	
600														15	10	5	10	10	5	15	7,5	3	15	7,5	3	
750														15	10	5	10	10	5	15	7,5	4	15	7,5	4	
800																				15	10	5	15	10	5	
1000																				15	10	5	15	10	5	

Example of order: Current transformer IZK 2U D 41; 400/5 A; 10 VA; class 10P 10