


Bus-bar type

IZS 1U

Protective current transformer bus-bar type IZS 1U.
Max voltage $U_m = 1,2 \text{ kV}$, test voltage $U_p = 6 \text{ kV}$.

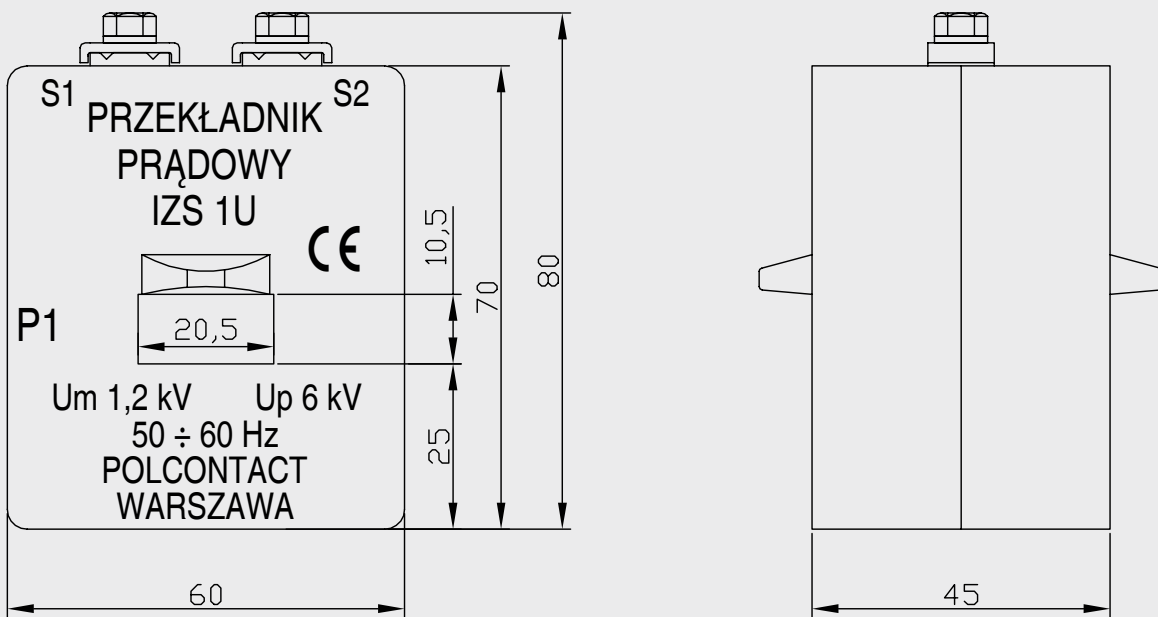

IZS 1U h 021						
I_{pn}	class 5P 5	class 5P 10	class 5P 15	class 10P 5	class 10P 10	class 10P 15
A	VA			VA		
150	3	1				
200	4	1,5		4	1,5	
250	5	2	1	5	2	1

Example of order: Current transformer IZS 1U h 021; 250/5 A; 2 VA; class 10P 10