


IZS 2U

Protective current transformer bus-bar type IZS 2U.
 Max voltage $U_m = 1,2 \text{ kV}$, test voltage $U_p = 6 \text{ kV}$.

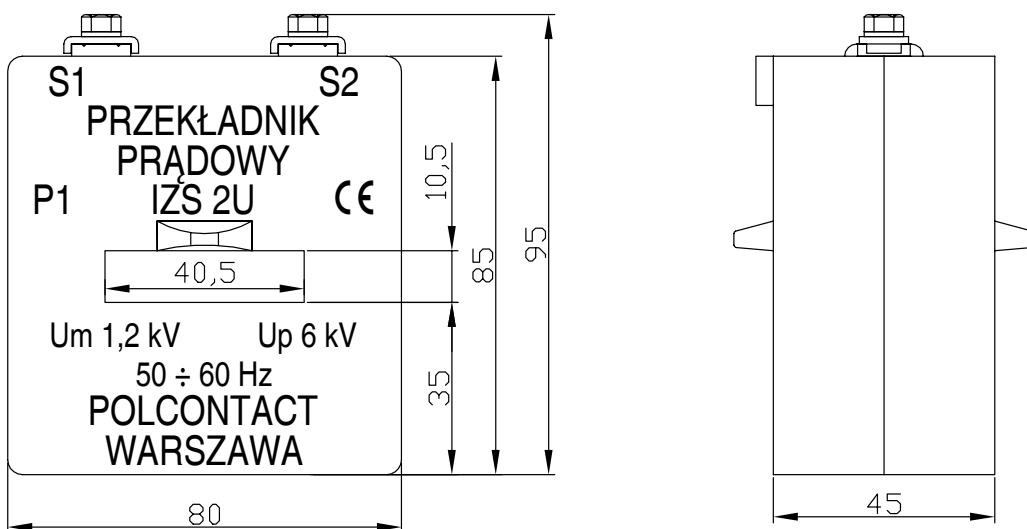

IZS 2U h 041						
I_n	class 5P 5	class 5P 10	class 5P 15	class 10P 5	class 10P 10	class 10P 15
A	VA			VA		
100		1		3	1	
150		1,5	1	4	1,5	1
200		2	1	5	2	1
250		3	1,5	7,5	3	1,5
300	7,5	4	2	7,5	4	2
400	7,5	3	1,5	7,5	3	1,5
500	5	2		5	2	

Example of order: Current transformer IZS 2U h 041; 300/5 A; 7,5 VA; class 5P 5