


ISN 2 for two ranges of primary current

Low voltage bus-bar type current transformer ISN 2 for two ranges of primary current
 Max bus-bar size 40x10; 50x10 or 60x10 mm. For horizontal bus.
 Max voltage $U_m = 1,2$ kV. Test voltage $U_p = 6$ kV

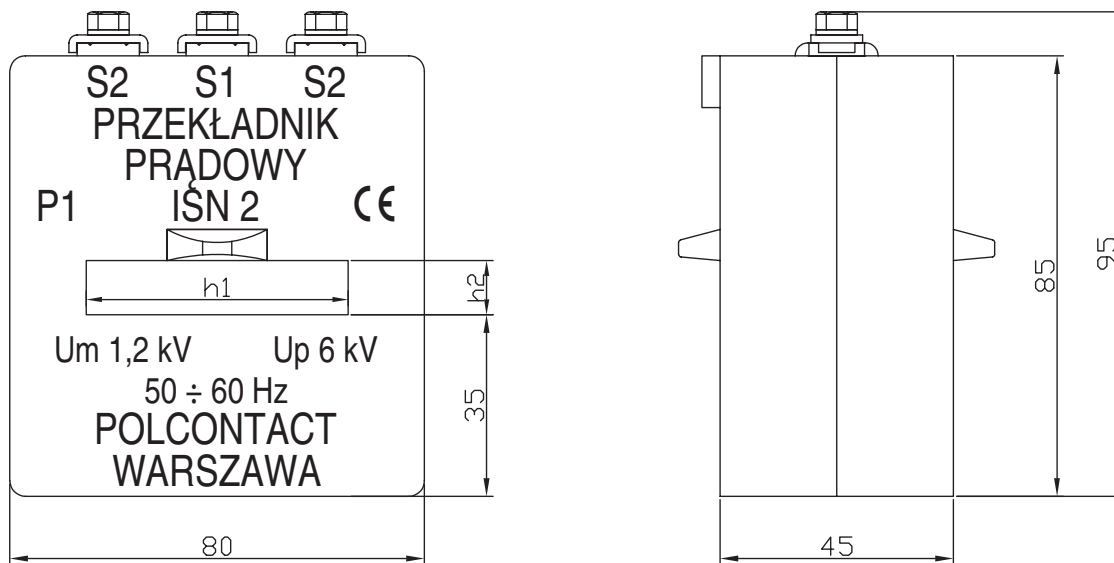

		ISN 2								
		h 041 $h_1 = 40,5$ mm $h_2 = 10,5$ mm			h 051 $h_1 = 50,5$ mm $h_2 = 10,5$ mm			h 061 $h_1 = 60,5$ mm $h_2 = 10,5$ mm		
I_{pn}	cl. 0,5	cl. 1	cl. 3	cl. 0,5	cl. 1	cl. 3	cl. 0,5	cl. 1	cl. 3	
A	VA			VA			VA			
100		2,5	5							
200		7,5	10							
150	2	5	7,5							
300	5	10	15							
200	2,5	7,5	10	2	5	7,5	2	5	7,5	
400	5	15	20	7,5	10	15	7,5	10	15	
250	5	10	15	2,5	5	7,5	2,5	5	7,5	
500	10	15	20	10	15	20	10	15	20	
300	5	10	15	2,5	5	7,5	2,5	5	7,5	
600	10	15	20	10	15	20	10	15	20	
400	7,5	10	15	5	10	15	5	10	15	
800	10	15	20	10	15	20	10	15	20	
500				5	10	15	5	10	15	
1000				10	15	20	10	15	20	
600				5	10	15	5	10	15	
1200				10	15	20	10	15	20	

Rated secondary current $I_{sn} = 5$ A or 1 A.

Other parameters available on request after consultation with our Technical Department

Example of order:
 Current transformers ISN 2 h 051;
 400-800/5 A; 5-10 VA; class 0,5