


IZS 31U

Protective current transformer bus-bar type IZS 31U.
Max voltage $U_m = 1,2 \text{ kV}$, test voltage $U_p = 6 \text{ kV}$.

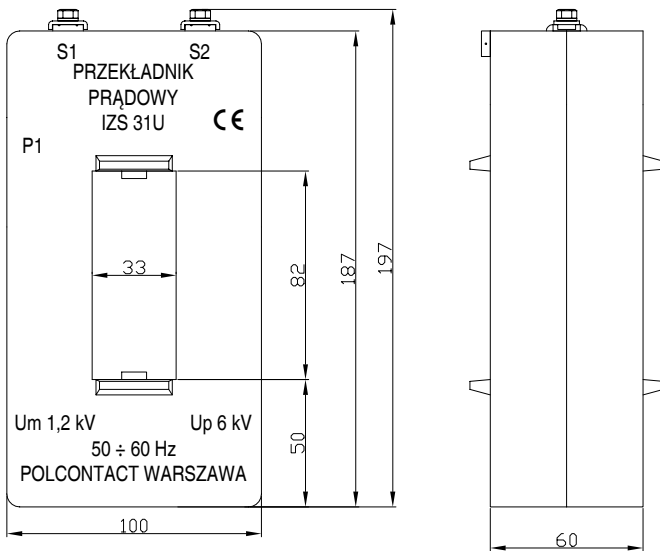

IZS 31U h 083						
I_{pn}	class 5P 5	class 5P 10	class 5P 15	class 10P 5	class 10P 10	class 10P 15
A	VA			VA		
100				2,5	1	
150	1	1	1	5	2	1
200	5	2,5	1,5	5	2,5	1,5
250	7,5	3	2	7,5	3	2
300	10	4	2,5	10	4	2,5
400	15	5	3	15	5	3
500	15	7,5	5	15	7,5	5
600	20	10	5	15	10	5
750	20	10	5	15	10	5
800	20	10	5	15	10	5
1000	20	10	5	15	10	5
1200	25	15	7,5	20	15	7,5
1250	25	15	7,5	20	15	7,5
1500	25	15	7,5	20	15	7,5

Example of order: Current transformer IZS 31U h 083; 400/5 A; 5 VA; class 5P 10