
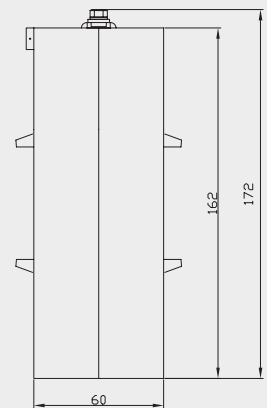


ISN 3m

Type	Model/ Dimension	Primary current	Rated parameters secondary circuit	
			burden	class
ISN 3m	h 061 $h_1 = 60,5 \text{ mm}$ $h_2 = 10,5 \text{ mm}$	$400 \div 1250 \text{ A}$	50 Ω 100 Ω 250 Ω	1
	h 081 $h_1 = 80,5 \text{ mm}$ $h_2 = 10,5 \text{ mm}$	$500 \div 2000 \text{ A}$	500 Ω 750 Ω	

Type	Model/ Dimensions	Primary current	Rated parameters secondary circuit	
			burden	class
ISN 30m	h 041 $h_1 = 10,5 \text{ mm}$ $h_2 = 42 \text{ mm}$ $C = 60 \text{ mm}$	$300 \div 1250 \text{ A}$	50 Ω 100 Ω 250 Ω 500 Ω 750 Ω	1
	h 051 $h_1 = 10,5 \text{ mm}$ $h_2 = 52 \text{ mm}$ $C = 55 \text{ mm}$	$300 \div 1250 \text{ A}$		
	h 061 $h_1 = 10,5 \text{ mm}$ $h_2 = 62 \text{ mm}$ $C = 50 \text{ mm}$	$300 \div 1600 \text{ A}$		
	h 043 $h_1 = 33 \text{ mm}$ $h_2 = 42 \text{ mm}$ $C = 60 \text{ mm}$	$300 \div 1600 \text{ A}$		
	h 053 $h_1 = 33 \text{ mm}$ $h_2 = 52 \text{ mm}$ $C = 55 \text{ mm}$	$300 \div 1600 \text{ A}$		
	h 063 $h_1 = 33 \text{ mm}$ $h_2 = 62 \text{ mm}$ $C = 50 \text{ mm}$	$400 \div 2000 \text{ A}$		

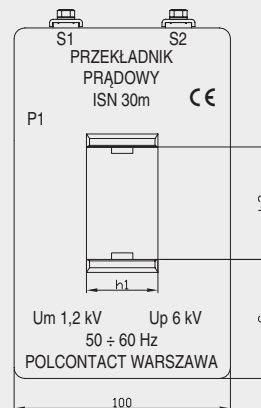

ISN 30m