Current transformer JK 24m D 60
measuring, protective, measuring nad protective
for putting on a single phase medium voltage cable

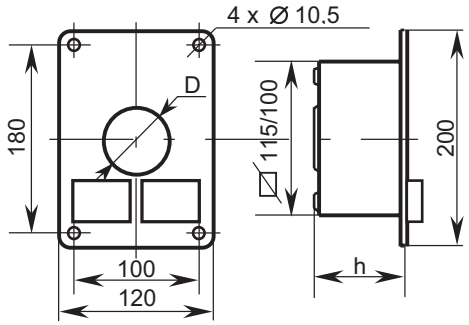

h - hight of the CT
a - 30 mm
b - 60 mm
c - 90 mm
d - 120 mm

Current transformer JK 24m D 60 (D = 60 mm)

Rated primary current A	Version	Measuring					Protective					Measuring and Protective			Identyfikation Number
		„P" single core		„2P" double core			„Z" single core		„2Z" double core			„PZ" double core			
		class 0.5		class 0.5			class 10P		class 10P			class 0.5	class 10P		
		FS 10		FS 10			10		10			FS 10	10		
		VA	h	VA	VA	h	VA	h	VA	VA	h	VA	VA	h	
30	I														2651
	II														2652
40	I														2653
	II														2654
50	I														2655
	II														2656
60	I														2657
	II														2658
75	I														2659
	II														2660
100	I						2,5	d							2661
	II														2662
125	I						2,5	d							2663
	II														2664
150	I														2665
	II	5	d				2,5	d							2666
200	I	7,5	d				2,5	b	2,5	2,5	d				2667
	II	10	d	5	5	d	5	d							2668
250	I	10	d	5	7,5	d	2,5	b	2,5	2,5	d	5	2,5	d	2669
	II	15	d	7,5	7,5	d	5	d				7,5	2,5	d	2670
300	I	10	b	7,5	10	d	5	d	2,5	2,5	d	7,5	2,5	d	2671
	II	15	c	10	10	d	7,5	d				10	2,5	d	2672
400	I	10	b	10	15	d	7,5	d	5	5	d	7,5	5	d	2673
	II	15	b	15	15	d	10	d				10	5	d	2674
500	I	10	a	10	15	b	7,5	b	5	7,5	d	10	7,5	d	2675
	II	15	a	15	15	b	10	d	7,5	7,5	d	15	7,5	d	2676
600	I	10	a	10	15	b									2677
	II	15	a	15	15	b									2678
750	I														2679
	II														2680

Rated secondary current: Isn= 5 A.
Other parameters available on request.